



ALL

TO PROTECT

Fire Rated Ductwork Specialists

Applus[®] FRE



Environment Friendly



Stability & Integrity of More Than 4 Hours



Factory Process Control



Audited By Independent Certified Agency



European Technology

www.fmcmetalfactory.com


info@fmc-metalfactory.com



- TESTED AS PER BS 476 PART 24
- NON COATED
- STABILITY 4 HOUR +
- INTEGRITY 4 HOUR +
- TESTED & CERTIFIED
 - **BY APPLUS LABORATORIES**

PRODUCT RANGE

- GI 120 STABILITY AND INTEGRITY OF 120 MINUTES
- GI 240 STABILITY AND INTEGRITY OF 240 MINUTES
- KED 120 STABILITY, INTEGRITY
 & INSULATION OF 120 MINUTES



DUCTWORK CONSTRUCTION


The Firewall Ductwork System is manufactured from Galvanised Steel sheet based on specification and similated test by Carling Fire. The Fire-Rated Ductwork has been test and certified by Applus to meet the following standards:

BS 476: PART 24: 1987

Furthermore, the Firewall® range of Fire-rated Ducts incorporates and are in compliance with the following standards:

BS 5588DW 144

Suitable for use as a Type A (Fire outside) and Type B (Fire inside/outside) fire-rated ductwork system for a period of up to 255 minutes of Stability and Integrity

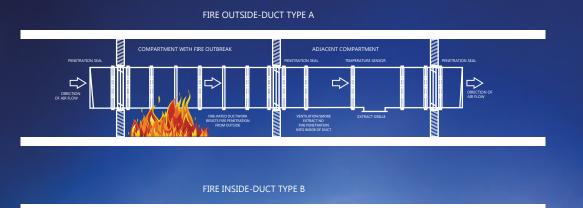

400 300 200

100

20



SUITABLE FOR USE AS

- Staircase Pressurization System
- Ventilation System
- Smoke Extract System
- Car park Extract System
- Kitchen Extract System

WHAT ARE WE TRYING TO ACHIEVE?

Protecting Human Lives.


- To ensure the safety of the people as they evacuate the building by protecting common areas i.e. Escape Corridors, Lift Lobbies for upto 4 hours.
- To minimize damage to the building and its contents by maintaining the fire compartmentation.

ISO 834: 1975 (E) FIRE RESISTANCE TEST STANDARD TIME-TEMPERATURE CURVE

Tested as per BS 476 Part 24 for the fire resistance of ventilation ductwork which is expressed in minutes of duration of heating in accordance with the ISO 834: 1985 (Cellulosic - Standard Time/Temperature Curve)

40 60 80 100 120 140 160 180 200 220 240

TIME (MINUTES)

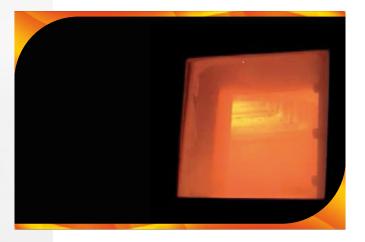






Additional services provided for installation:

- Induction Programs for all Client Personnel involved in Installation
- Periodic Inspection of Installed Artwork for Compliance
- Feedback to Clients on Installation of Ductwork

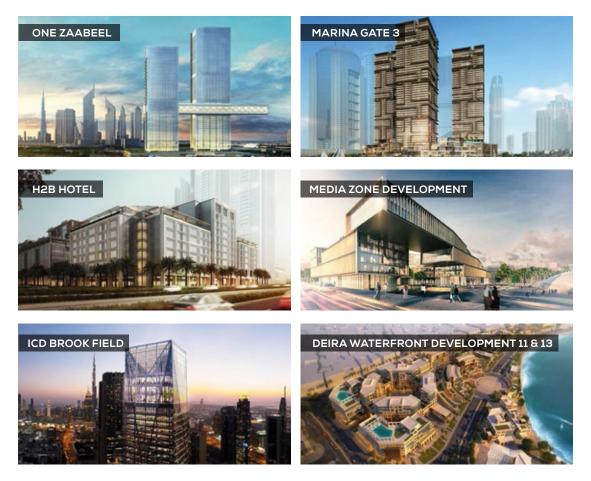

The Firewall® Ductwork is suitable for Residental, Commercial, Hotels, Hospitals, High Rise Buildings etc.

Authorized Exclusive Licensee



Progulf Air-conditioning Industries LLC PLOT 597 - 392, Dubai Investment Park Dubai, UAE For more information about our product, scan the below code to visit our website.



CARLING FIRE OFFICE

Carling Fire Research and Technologies Limited Nicosia, Cyprus